


DECORATIVE FIXTURES

interior_fixed_unlensed

interior

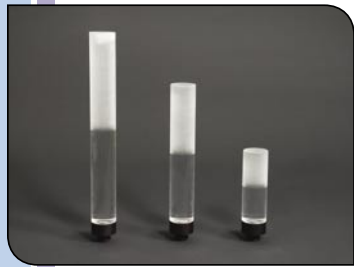

FS-310 FIBERSTIK

FS-310-5 Dimensions: 1.5" OD x 5" H (38.1MM OD x 127MM H)
FS-310-9 Dimensions: 1.5" OD x 9" H (38.1MM OD x 229MM H)
FS-310-12 Dimensions: 1.5" OD x 12" H (38.1MM OD x 305MM H)

FSPT Fibers: 25 (MAX.) **Finish Options:** CLEAR

Technical Remarks:

Partially knurled acrylic cylinder on anodized aluminum threaded base. Available in three lengths: 5" (FS-310-5), 9" (FS-310-9), and 12" (FS-310-12). Mount to standard NPT box or with optional FS-910 Ground Stake. Secure fiber to base with epoxy (FS-115).

Prime Material: ACRYLIC
Mounting: 1/2" NPT

interior



FS-910 GROUND MOUNTING STAKE

Max. Overall Dimensions: 2.05" OD x 6" H (52.07MM OD x 152.4MM H)

Finish Options: BLACK

Technical Remarks:

Threaded ground mounting stake for use with FS-210 and FS-310. Screw stake onto bottom of fixture, then depress stake into soil.

Prime Material: PLASTIC
Mounting: 1/2" NPT

interior



FIBERGLOBE HOLLOW PLASTIC "G" LAMP

Max. Overall Dimensions: 2.35" OD ROUND (59.7MM OD ROUND)

Rough-in: 0.96" (24.38MM) **Beam Spread:** 60 (MIN.) – 60 (MAX.)
Recess: 4" (102MM) **Finish Options:** CLEAR, FROSTED
FSPT Fibers: 25 (MAX.)

Technical Remarks:

Shatter resistant polycarbonate globe intended for use as an unbreakable and remotely-relamped alternative to standard G lamps. Fixture includes globe and gasketed mounting collar.

Prime Material: PLASTIC
Mounting: GASKETED MOUNTING COLLAR

interior



CRE2503 SPARKLE POINT

Max. Overall Dimensions: 2" OD x 3" H (50.8MM OD x 65MM H)
Trim/Flange Dimensions: 2" OD x 0.094" H (50.8MM OD x 2.39MM H)
Aperture Dimensions: 0.43" OD (10MM OD)

Rough-in: 1.575" (40MM) **Finish Options:** WHITE, BLACK, GOLD, SILVER
Recess: 1.378" (35MM)
FSPT Fibers: 50 (MAX.)
Ferrules: 8MM

Prime Material: OTHER METAL, ACRYLIC
Mounting: SPRING CLIPS INCLUDED

interior



CRE2504 DROP ACRYLIC ROD

Max. Overall Dimensions: 2" OD x 3" H (50.8MM OD x 65MM H)
Trim/Flange Dimensions: 2" OD x 0.094" H (50.8MM OD x 2.39MM H)
Aperture Dimensions: 0.98" OD (20MM OD)

Rough-in: 1.575" (40MM) **Finish Options:** WHITE, BLACK, GOLD, SILVER
Recess: 1.378" (35MM)
FSPT Fibers: 75 (MAX.)
Ferrules: 8MM, 10MM

Prime Material: OTHER METAL, ACRYLIC
Mounting: SPRING CLIPS INCLUDED

DECORATIVE FIXTURES

interior_fixed_unlensed



interior




CRE2505 DROP ACRYLIC CONE

Max. Overall Dimensions: 2" OD x 3" H (50.8MM OD x 65MM H)
Trim/Flange Dimensions: 2" OD x 0.094" H (50.8MM OD x 2.39MM H)
Aperture Dimensions: 0.98" OD (24.89MM OD)

Rough-in: 1.575" (40MM) **Finish Options:** WHITE, BLACK, GOLD, SILVER
Recess: 1.378" (35MM)
FSPT Fibers: 75 (MAX.)
Ferrules: 8MM, 10MM

Prime Material: OTHER METAL, ACRYLIC
Mounting: SPRING CLIPS INCLUDED

interior




CRE2506 DROP ACRYLIC TUBE

Max. Overall Dimensions: 2" OD x 3" H (50.8MM OD x 65MM H)
Trim/Flange Dimensions: 2" OD x 0.094" H (50.8MM OD x 2.39MM H)
Aperture Dimensions: 0.98" OD (24.89MM OD)

Rough-in: 1.575" (40MM) **Finish Options:** WHITE, BLACK, GOLD, SILVER
Recess: 1.378" (35MM)
FSPT Fibers: 75 (MAX.)
Ferrules: 8MM, 10MM

Prime Material: OTHER METAL, ACRYLIC
Mounting: SPRING CLIPS INCLUDED

interior



CRE2507 WALL WASHER

Max. Overall Dimensions: 2" OD x 2.34" H (50.8MM OD x 59.84MM H)
Trim/Flange Dimensions: 2" OD x 0.094" H (50.8MM OD x 2.39MM H)
Aperture Dimensions: 0.876" OD (22.25MM OD)

Rough-in: 1.575" (40MM) **Finish Options:** WHITE, BLACK, GOLD, SILVER
Recess: 1.378" (35MM)
FSPT Fibers: 75 (MAX.)
Ferrules: 8MM, 10MM

Prime Material: OTHER METAL, ACRYLIC
Mounting: SPRING CLIPS INCLUDED

DECORATIVE POINTS AND CRYSTALS

interior_fixed_unlensed

interior



FE-9001 FINE POINT	
Max. Overall Dimensions: 0.63" OD x 0.881" H (16MM OD x 22.4MM H)	
Trim/Flange Dimensions: 0.63" OD x 0.093" H (16MM OD x 2.4MM H)	
Aperture Dimensions: 0.04" OD (1MM OD)	
Rough-in: 0.394" (10MM)	Finish Options: GOLD, SILVER
Recess: 0.788" (20MM)	
FSPT Fibers: 1 (MAX.)	

Prime Material: PLASTIC
Mounting: SLEEVE INCLUDED

interior



FE-9002 BALL LENS POINT	
Max. Overall Dimensions: 0.63" OD x 0.936" H (16MM OD x 23.8MM H)	
Trim/Flange Dimensions: 0.63" OD x 0.148" H (16MM OD x 3.8MM H)	
Aperture Dimensions: 0.177" OD (4.5MM OD)	
Rough-in: 0.394" (10MM)	Finish Options: GOLD, SILVER
Recess: 0.788" (20MM)	
FSPT Fibers: 3 (MAX.)	

Prime Material: PLASTIC
Mounting: SLEEVE INCLUDED

interior



FE-9003 CRYSTAL POINT	
Max. Overall Dimensions: 0.63" OD x 1.3" H (16MM OD x 33MM H)	
Trim/Flange Dimensions: 0.63" OD x 0.512" H (16MM OD x 13MM H)	
Aperture Dimensions: 0.306" OD (7.8MM OD)	
Rough-in: 0.394" (10MM)	Finish Options: GOLD, SILVER
Recess: 0.788" (20MM)	
FSPT Fibers: 3 (MAX.)	

Prime Material: PLASTIC
Mounting: SLEEVE INCLUDED

interior



FE-9004 CRYSTAL POINT	
Max. Overall Dimensions: 0.63" OD x 1.94" H (16MM OD x 49.3MM H)	
Trim/Flange Dimensions: 0.63" OD x 0.512" H (16MM OD x 13MM H)	
Aperture Dimensions: 0.306" OD (7.8MM OD)	
Rough-in: 0.394" (10MM)	Finish Options: GOLD, SILVER
Recess: 0.788" (20MM)	
FSPT Fibers: 3 (MAX.)	

Prime Material: PLASTIC
Mounting: SLEEVE INCLUDED

interior



FE9050 MINI BULLET POINT	
Max. Overall Dimensions: 0.5" OD x 1.25" H (12.7MM OD x 31.75H)	
Trim/Flange Dimensions: 0.5" OD x 0.06" H (12.7MM OD x 1.5MM H)	
Aperture Dimensions: 0.322" OD (8.18MM OD)	
Rough-in: 0.35" (8.9MM)	Finish Options: CLEAR
Recess: 4" (101MM)	
FSPT Fibers: 12 (MAX.)	
Ferrules: INCLUDED	

Prime Material: PLASTIC
Mounting: LOCKING NUT INCLUDED



DECORATIVE POINTS AND CRYSTALS

interior_fixed_unlensed

interior



CRE1101 MICRO BULLET	
Max. Overall Dimensions: 0.157" OD x 0.433" H (4MM OD x 11MM H)	
Trim/Flange Dimensions: 0.157" OD x 0.1" H (4MM OD x 2.5MM H)	
Aperture Dimensions: 0.157" OD (4MM OD)	
Rough-in: 0.118" OD (3MM OD)	Finish Options: CLEAR
Recess: 0.315" (8MM)	
FSPT Fibers: 1 (MAX.)	

Prime Material: PLASTIC
Mounting: ADHESIVE

interior



CRE1102 MINI BULLET	
Max. Overall Dimensions: 0.25" OD x 0.768" H (6.4MM OD x 19.5MM H)	
Trim/Flange Dimensions: 0.25" OD x 0.492" H (6.4MM OD x 12.5MM H)	
Aperture Dimensions: 0.197" OD (5MM OD)	
Rough-in: 0.25" OD (6.4MM OD)	Finish Options: CLEAR
Recess: 0.28" (7.1MM)	
FSPT Fibers: 12 (MAX.)	

Prime Material: PLASTIC
Mounting: ADHESIVE

interior



CRE1103 BULLET	
Max. Overall Dimensions: 0.374" OD x 0.964" H (9.5MM OD x 24.5MM H)	
Trim/Flange Dimensions: 0.374" OD x 0.61" H (9.5MM OD x 15.5MM H)	
Aperture Dimensions: 0.315" OD (8MM OD)	
Rough-in: 0.374" OD (9.5MM OD)	Finish Options: CLEAR
Recess: 0.354" (9MM)	
FSPT Fibers: 25 (MAX.)	

Prime Material: PLASTIC
Mounting: ADHESIVE

interior



CRE1104 MAXI BULLET	
Max. Overall Dimensions: 0.866" OD x 1.705" H (22MM OD x 43.3MM H)	
Trim/Flange Dimensions: 0.866" OD x 0.713" H (22MM OD x 18.1MM H)	
Aperture Dimensions: 0.5" OD (12.7MM OD)	
Rough-in: 0.504" OD (12.8MM OD)	Finish Options: CLEAR
Recess: 1" (25.4MM)	
FSPT Fibers: 75 (MAX.)	
Ferrules: 8MM	

Prime Material: PLASTIC
Mounting: ADHESIVE

interior



CRE1105 ICICLE BULLET	
Max. Overall Dimensions: 0.512" OD x 3.5" H (13MM OD x 88.9MM H)	
Trim/Flange Dimensions: 0.512" OD x 3.105" H (13MM OD x 78.9MM H)	
Aperture Dimensions: 0.5" OD (12.7MM OD)	
Rough-in: 0.394" OD (10MM OD)	Finish Options: CLEAR
Recess: 0.394" (10MM)	
FSPT Fibers: 12 (MAX.)	

Prime Material: PLASTIC
Mounting: ADHESIVE

DECORATIVE POINTS AND CRYSTALS

interior_fixed_unlensed

interior



CRE1106 OPAL BALL	
Max. Overall Dimensions: 0.409" OD x 0.409" H (10.4MM OD x 10.4MM H)	
Trim/Flange Dimensions: 0.409" OD x 0.409" H (10.4MM OD x 10.4MM H)	
Aperture Dimensions: 0.409" OD (10.4MM OD)	
Rough-in: 0.409" OD (10.4MM OD)	Finish Options: FROSTED
FSPT Fibers: 12 (MAX.)	

Technical Remarks:
Designed to be adhered to end of fibers with FS-115.

Prime Material: PLASTIC
Mounting: ADHESIVE

interior



CRE1107 5 POINT STAR	
Max. Overall Dimensions: 1.063" OD x 0.354" H (27MM OD x 9MM H)	
Trim/Flange Dimensions: 1.063" OD x 0.118" H (27MM OD x 3MM H)	
Aperture Dimensions: 1.063" OD (27MM OD)	
Rough-in: 0.315" (8MM)	Finish Options: CLEAR
Recess: 0.236" (6MM)	
FSPT Fibers: 12 (MAX.)	

Prime Material: PLASTIC
Mounting: ADHESIVE

interior



CRE1108 MICRO BULLET WITH BEZEL	
Max. Overall Dimensions: 0.394" OD x 1.043" H (10MM OD x 26.5MM H)	
Trim/Flange Dimensions: 0.394" OD x 0.118" H (10MM OD x 3MM H)	
Aperture Dimensions: 0.158" OD (4MM OD)	
Rough-in: 0.307" (7.8MM)	Finish Options: WHITE, BLACK
Recess: 0.925" (23.5MM)	
FSPT Fibers: 1 (MAX.)	

Prime Material: PLASTIC
Mounting: ADHESIVE

interior



CRE1109 MINI BULLET WITH BEZEL	
Max. Overall Dimensions: 0.472" OD x 1.043" H (12MM OD x 26.5MM H)	
Trim/Flange Dimensions: 0.472" OD x 0.118" H (12MM OD x 3MM H)	
Aperture Dimensions: 0.197" OD (5MM OD)	
Rough-in: 0.394" (10MM)	Finish Options: WHITE, BLACK
Recess: 0.925" (23.5MM)	
FSPT Fibers: 12 (MAX.)	

Prime Material: PLASTIC
Mounting: ADHESIVE

interior



CRE1110 BULLET WITH BEZEL	
Max. Overall Dimensions: 0.787" OD x 1.102" H (20MM OD x 28MM H)	
Trim/Flange Dimensions: 0.787" OD x 0.236" H (20MM OD x 6MM H)	
Aperture Dimensions: 0.315" OD (8MM OD)	
Rough-in: 0.689" (17.5MM)	Finish Options: WHITE, BLACK
Recess: 0.866" (22MM)	
FSPT Fibers: 25 (MAX.)	

Prime Material: PLASTIC
Mounting: ADHESIVE

DECORATIVE POINTS AND CRYSTALS

interior_fixed_unlensed



interior



CRE1111 BULLET WITH BEZEL	
Max. Overall Dimensions: 1" OD x 1.588" H (25.4MM OD x 40.3MM H)	
Trim/Flange Dimensions: 1" OD x 0.486" H (25.4MM OD x 12.3MM H)	
Aperture Dimensions: 0.197" OD (5MM OD)	
Rough-in: 0.375" (9.5MM)	Finish Options: WHITE, BLACK
Recess: 1.102" (28MM)	
FSPT Fibers: 12 (MAX.)	

Prime Material: PLASTIC
Mounting: ADHESIVE

interior



CRE1112 MAXI BULLET WITH BEZEL	
Max. Overall Dimensions: 1.417" OD x 1.693" H (36MM OD x 43MM H)	
Trim/Flange Dimensions: 1.417" OD x 0.63" H (36MM OD x 16MM H)	
Aperture Dimensions: 0.5" OD (12.7MM OD)	
Rough-in: 0.866" (22MM)	Finish Options: WHITE, BLACK
Recess: 1.063" (27MM)	
FSPT Fibers: 75 (MAX.)	
Ferrules: 8MM	

Prime Material: PLASTIC
Mounting: ADHESIVE

interior



CRE1113 5 POINT STAR WITH BEZEL	
Max. Overall Dimensions: 1.063" OD x 1.024" H (27MM OD x 26MM H)	
Trim/Flange Dimensions: 0.63" OD x 0.197" H (16MM OD x 5MM H)	
Aperture Dimensions: 1.063" OD (27MM OD)	
Rough-in: 0.504" (12.8MM)	Finish Options: WHITE, BLACK
Recess: 0.827" (21MM)	
FSPT Fibers: 12 (MAX.)	

Prime Material: PLASTIC
Mounting: ADHESIVE

interior



CRE1114 OPAL BALL WITH BEZEL	
Max. Overall Dimensions: 0.63" OD x 0.512" H (16MM OD x 13MM H)	
Trim/Flange Dimensions: 0.63" OD x 0.1" H (16MM OD x 2.5MM H)	
Aperture Dimensions: 0.409" OD (10.4MM OD)	
Rough-in: 0.504" (12.8MM)	Finish Options: WHITE, BLACK
Recess: 0.75" (19MM)	

Prime Material: PLASTIC
Mounting: ADHESIVE

DECORATIVE FIXTURES

exterior_fixed_unlensed

exterior



CRE2601 MICRO MINI BOLLARD	
Max. Overall Dimensions:	4" OD x 3.324" H (102MM OD x 84.4MM H)
Trim/Flange Dimensions:	4" OD x 0.254" H (102MM OD x 6.45MM H)
Aperture Dimensions:	2" OD (50.8MM OD)
Rough-in:	1.378" (35MM)
Recess:	1.25" (31.8MM)
FSPT Fibers:	50 (MAX.)
Ferrules:	8MM
Finish Options:	BLACK, STAINLESS STEEL

Prime Material:	ALUMINUM AND ACRYLIC
Mounting:	SCREWS

exterior



CRE2602 MICRO DECORATIVE FLAT BOLLARD	
Max. Overall Dimensions:	4" OD x 2.521" H (102MM OD x 64.03MM H)
Trim/Flange Dimensions:	4" OD x 0.254" H (102MM OD x 6.45MM H)
Aperture Dimensions:	2" OD (50.8MM OD)
Rough-in:	1.378" (35MM)
Recess:	1.25" (31.8MM)
FSPT Fibers:	50 (MAX.)
Ferrules:	8MM
Finish Options:	BLACK, STAINLESS STEEL

Prime Material:	ALUMINUM AND ACRYLIC
Mounting:	SCREWS

exterior



CRE2603 MICRO LATERAL FLAT BOLLARD	
Max. Overall Dimensions:	4" OD x 2.521" H (102MM OD x 64.03MM H)
Trim/Flange Dimensions:	4" OD x 0.254" H (102MM OD x 6.45MM H)
Aperture Dimensions:	2" OD (50.8MM OD)
Rough-in:	1.378" (35MM)
Recess:	1.25" (31.8MM)
FSPT Fibers:	50 (MAX.)
Ferrules:	8MM
Finish Options:	BLACK, STAINLESS STEEL

Technical Remarks:
Fixture allows lateral light out of sides and top.

Prime Material:	ALUMINUM AND ACRYLIC
Mounting:	SCREWS

exterior



CRE2604 MICRO DOMED FLAT BOLLARD	
Max. Overall Dimensions:	4" OD x 2.134" H (102MM OD x 54.2MM H)
Trim/Flange Dimensions:	4" OD x 0.254" H (102MM OD x 6.45MM H)
Aperture Dimensions:	2" OD (50.8MM OD)
Rough-in:	1.378" (35MM)
Recess:	1.25" (31.8MM)
FSPT Fibers:	50 (MAX.)
Ferrules:	8MM
Finish Options:	BLACK, STAINLESS STEEL

Prime Material:	ALUMINUM AND ACRYLIC
Mounting:	SCREWS

UNDERWATER FIXTURES

exterior_fixed_lensed



underwater



LNS-100 UNDERWATER LENSED FIXTURE	
Max. Overall Dimensions:	3.5" OD x 1.75" H (88.9MM OD x 44.4MM H)
Lens Dimensions:	2.18" OD (55.4MM OD)
Rough-in:	2" (50.8MM)
FSPT Fibers:	100 (MAX.)
Ferrules:	INCLUDED
Finish Options:	BLACK, WHITE

Technical Remarks:
Available for use with 75 fibers maximum (LNS-100G-white finish, LNS-100BLG-black finish, and LNS-100A-white finish with locking nut). A lens tightening tool (FS-117) is required for installation and must be ordered separately. Comes with fresnel lens or optional broadcast lens (B11458).

Prime Material:	PLASTIC
Mounting:	CONDUIT, STUBBING TO 1.5" PVC

underwater



LNS-225 UNDERWATER LENSED FIXTURE	
Max. Overall Dimensions:	3.5" OD x 1.75" H (88.9MM OD x 44.4MM H)
Lens Dimensions:	2.18" OD (55.4MM OD)
Rough-in:	2" (50.8MM)
FSPT Fibers:	225 (MAX.)
Ferrules:	INCLUDED
Finish Options:	BLACK, WHITE

Technical Remarks:
Available for use with 225 fibers (LNS-225G-white finish, and LNS-225A-white finish with locking nut). A lens tightening tool (FS-117) is required for installation and must be ordered separately. Comes with fresnel lens or optional broadcast lens (B11458).

Prime Material:	PLASTIC
Mounting:	CONDUIT, STUBBING TO 1.5" PVC

underwater



LBM06102030S2 UNDERWATER LENSED FIXTURE	
Max. Overall Dimensions:	3.973" OD x 2.362" H (100MM OD x 60MM H)
Trim/Flange Dimensions:	3.973" OD x 0.394" H (100MM OD x 10MM H)
Aperture Dimensions:	2.205" OD (56MM OD)
Rough-in:	2.441" (62MM)
Recess:	1.969" (50MM)
FSPT Fibers:	150 (MAX.)
Ferrules:	8MM, 10MM
Beam Spread:	85 (MIN.) – 85 (MAX.)
Finish Options:	STAINLESS STEEL

Technical Remarks:
Material is V4A stainless steel, resistant to salt water. Comes with LBM06102000 'LNS 100V4A Installation Kit', LBM061020301 'LNS 100V4A Mounting Sleeve', and LBM061020302 'LNS100V4A Pour-In-Ring'.

Prime Material:	STAINLESS STEEL
Mounting:	REFER TO TECHNICAL REMARKS

underwater



CRE2153 LENSED FOUNTAIN SPOTLIGHT	
Max. Overall Dimensions:	1.063" OD x 3.15" H (27MM OD x 80MM H)
Trim/Flange Dimensions:	1.063" OD (27MM OD)
Aperture Dimensions:	1" OD (25.4MM OD)
FSPT Fibers:	75 (MAX.)
Ferrules:	8MM, 10MM
Beam Spread:	17 (MIN.) – 17 (MAX.)
Finish Options:	STAINLESS STEEL

Technical Remarks:
Mount to fountain head with 1" pipe clamp, or secure to any object with appropriate device.

Prime Material:	STAINLESS STEEL
Mounting:	PIPE CLAMP BY OTHERS

underwater



LBM061208202 MINI-FOUNTAIN FITTING	
Max. Overall Dimensions:	1.338" OD x 1.693" H (34MM OD x 43MM H)
Trim/Flange Dimensions:	1.338" OD x 0.079" H (34MM OD x 2MM H)
Aperture Dimensions:	0.75" OD (19MM OD)
Rough-in:	1" (25.4MM)
Recess:	1.496" (38MM)
FSPT Fibers:	75 (MAX.)
Ferrules:	8MM, 10MM
Beam Spread:	15 (MIN.) – 35 (MAX.)
Finish Options:	STAINLESS STEEL

Technical Remarks:
Adhere inside 1-1/4" PVC pipe or directly into wall or floor of pool/pond/fountain with Fiberstars silicon adhesive (FS-136 or FS-138).

Prime Material:	STAINLESS STEEL
Mounting:	REFER TO TECHNICAL REMARKS